



SELF-CONTAINED COMPACTORS

K-PAC™'s Self-Contained Compactors are widely used for wet waste trash applications. Self-Contained Trash Compactors are the perfect machines for hospitals, grocery stores, universities, stadiums, restaurants, and a lot more.



FEATURES & BENEFITS:

- Full Door Seal with large surface area O-Seal design
- Single Side Ratchet Latch System for Driver Ease
- Hinged Breaker Bar Teeth come standard
- Power Unit is interchangeable with other Brands
- Largest Cylinder Maintenance Access in the Industry
- Pressure Shift Cylinders – limits bypass failures and subsequent costly repairs

3-2-1 WARRANTY

3 Years Structure


2 Years Parts

1 Year Labor



SELF-CONTAINED COMPACTORS

MODELS	KP2SC-15	KP2SC-20	KP2SC-25	KP2SC-30	KP2SC-35	KP2SC-39
Clear Top Opening	41" x 58"					
"B" (Inches)	48"	48"	48"	48"	48"	48"
"C" (Inches)	67"	67"	67"	67"	67"	67"
"D" (Inches)	174"	216"	216"	246"	276"	300"
"D" (Feet)	14 1/2'	18'	18'	20 1/2'	23'	25'
"E" (Inches)	90"	90"	102"	102"	102"	102"
Weight (Lbs)	8,860	9,520	10,080	10,820	11,250	11,925

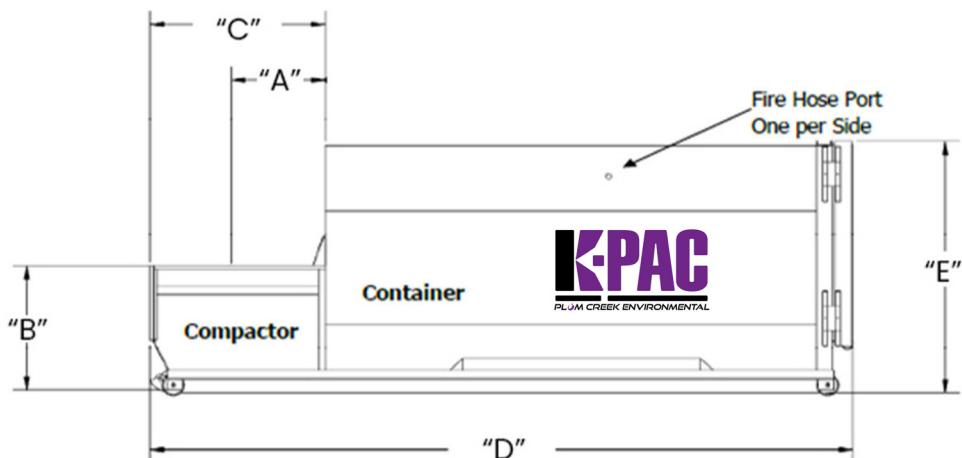

Dimensions not shown: 100" (2540mm) Overall Width

STANDARD POWER PACK

Power Pack	10 HP / 3 Phase 230/460 Volt 60 Hertz
Hydraulic Pump	12 GPM
Reservoir	20 Gallons

KP2SC PERFORMANCE SPECS

Basic Size (cu yd)	1.27
Clear Top Opening	41" x 58"
Ram Penetration	6"
Normal Force	38,600 lbs
Normal Pressure	1800 psi
Maximum Force	42,900 lbs
Maximum Pressure	2000 psi
Ram Face Width	60"
Ram Face Height	24"
Normal Ram Face Pressure	26.8 psi
Maximum Ram Face Pressure	29.8 psi
Cycle Time	27 sec
Motor	10 HP
Pump	12 GPM
Cylinders (quantity)	2
Cylinder Bore	4"
Cylinder Size Rod	2 1/2"
Cylinder Stroke	31 1/4"

