

# K-PAC

PLUM CREEK ENVIRONMENTAL

## STATIONARY COMPACTORS

### Features:

- Designed for Commercial and Industrial Applications
- Typically used for Dry Waste applications
- Allen Bradley PLC Controller
- Full Line of Stationary Compactors from 2 to 6 Cu Yd
- Compatible with most 40 Cu Yd Receiving Containers



**3-2-1 WARRANTY**

**3 Years Structure**


**2 Years Parts**

**1 Year Labor**



# STATIONARY COMPACTORS


	KP-2ST (2YD)	KP-3ST (3YD)	KP-4ST (4YD)
Basic Size (Cu Yd)	1.44	2.45	2.97
A - Length (in)	120"	174"	174"
B - Deck Height (in)	48"	48"	54"
C - Width (in)	72 1/2"	72 1/2"	72 1/2"
D - Clear Top Opening L x W	41" x 58"	58" x 68"	58" x 68"
E - Ram Face - W x H	60" x 28"	60" x 28"	60" x 34"
Ram Penetration	13"	13"	13"
Normal Force (lbs)	50,900	50,900	50,900
Normal Pressure (psi)	1,800	1,800	1,800
Maximum Force (lbs)	56,500	56,500	56,500
Maximum Pressure (psi)	2,000	2,000	2,000
Cycle Time (sec)	60	51	51
Motor (HP)	10	15	15
Pump (GPM)	12	18 1/2	18 1/2
Cylinder Bore (in)	6"	6"	6"
Cylinder Size Rod (in)	2 1/2"	4"	4"
Cylinder Stroke (in)	54"	82"	82"

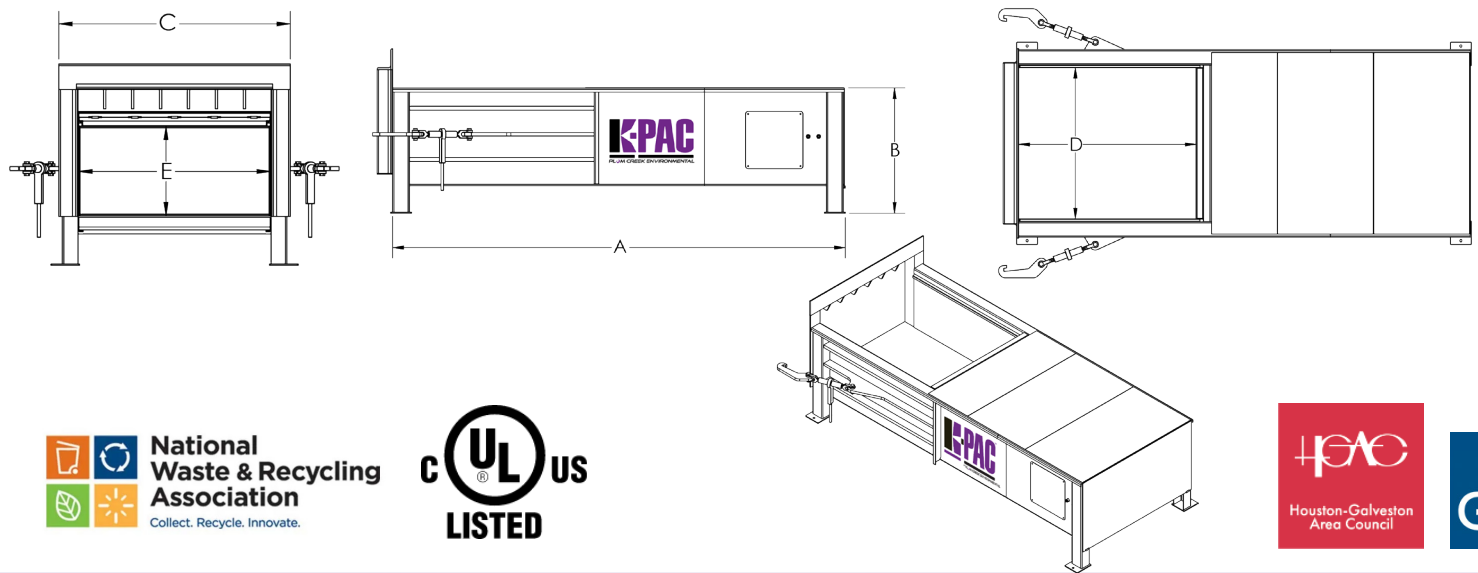



# STATIONARY COMPACTORS

	KP-2STHD (2YD)	KP-3STHD (3YD)	KP-4STHD (4YD)
Basic Size (Cu Yd)	1.48	2.45	2.97
A - Length (in)	120"	174"	174"
B - Deck Height (in)	48"	48"	54"
C - Width (in)	72 1/2"	72 1/2"	72 1/2"
D - Clear Top Opening L x W	41" x 58"	68" x 58"	68" x 58"
E - Ram Face - W x H	60" x 28"	60" x 28"	60" x 34"
Ram Penetration	13"	13"	13"
Normal Force (lbs)	69,250	69,250	69,250
Normal Pressure (psi)	1,800	1,800	1,800
Maximum Force (lbs)	77,000	77,000	77,000
Maximum Pressure (psi)	2,000	2,000	2,000
Cycle Time (sec)	78	74	74
Motor (HP)	10	15	15
Pump (GPM)	12	18.5	18.5
Cylinder Bore (in)	7"	7"	7"
Cylinder Size Rod (in)	4"	4"	4"
Cylinder Stroke (in)	56"	82"	82"

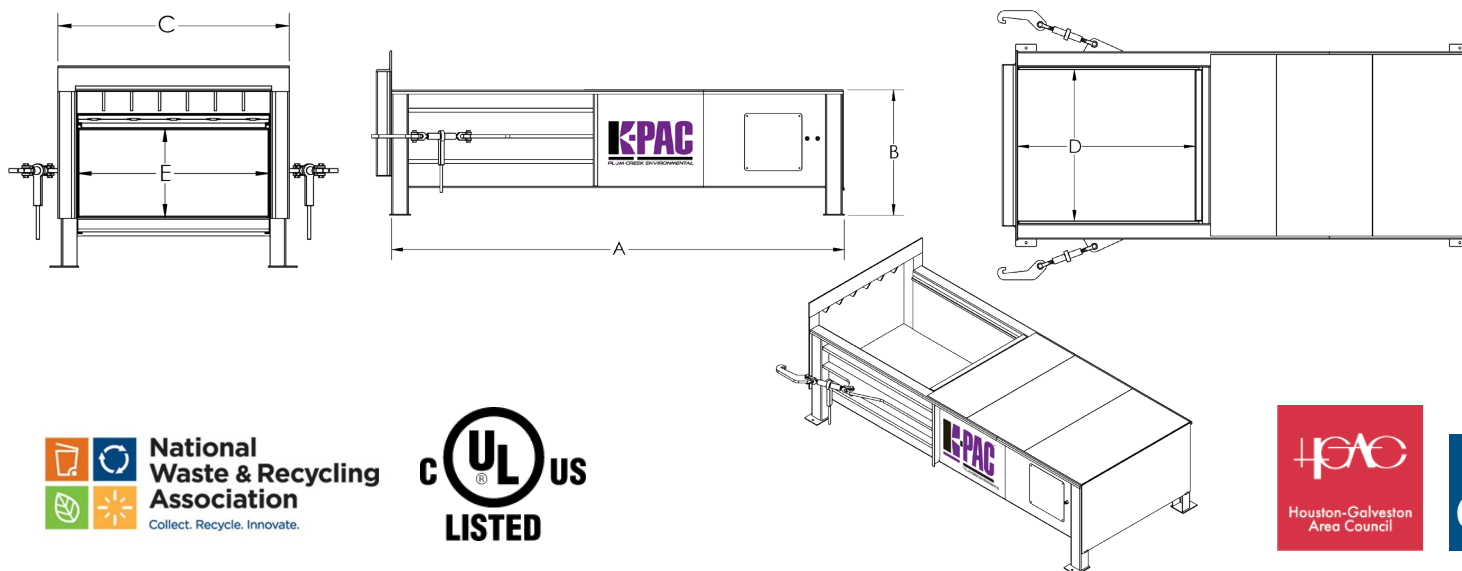



# STATIONARY COMPACTORS

	KP-5ST (5YD)	KP-5STHD (5YD)	KP-6ST (6YD)	KP-6STHD (6YD)
Basic Size (Cu Yd)	3.46	3.46	4.20	4.20
A - Length (in)	236 1/2"	236 1/2"	236 1/2"	236 1/2"
B - Deck Height (in)	48"	48"	54"	54"
C - Width (in)	72 1/2"	72 1/2"	72 1/2"	72 1/2"
D - Clear Top Opening L x W (in)	96" x 58"	96" x 58"	96" x 58"	96" x 58"
Ram Penetration (in)	13"	13"	13"	13"
Normal Force (lbs)	50,900	69,250	50,900	69,250
Normal Pressure (psi)	1,800	1,800	1,800	1,800
Maximum Force (lbs)	56,500	77,000	56,500	77,000
Maximum Pressure (psi)	2,000	2,000	2,000	2,000
Ram Face Width (in)	60"	60"	60"	60"
Ram Face Height (in)	28"	28"	34"	34"
Cycle Time (sec)	35	51	35	51
Motor (HP)	20	20	20	20
Pump (GPM)	36	36	36	36
Cylinder Bore (in)	6"	7"	6"	7"
Cylinder Size Rod (in)	4"	4"	4"	4"
Cylinder Stroke (in)	110"	110"	110"	110"

